

## INSTALLATION INSTRUCTIONS FOR 722-355

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

### ASSEMBLY THE FIXTURE

1. Carefully unpack the fixture from the package. Lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
2. Shut off power at the circuit breaker and remove old fixture including the crossbar.
3. Thread center tube (5) onto nipple (4) and thread center tube (6) onto the top of center tube (5) nipple, then thread center tube (7) onto the top of center tube (6) nipple, the last thread nipple the top of it onto the swivel (8).
4. Slide glass shade (2) over socket (3), then secure it using socket ring (1).

### MOUNTING THE FIXTURE

1. Shut off the power supply at the fuse box or circuit breaker box, remove the old fixture from ceiling, including the cross bar.
2. Carefully unpack your new fixture and lay out all the parts on a clear area, take care not to lose any small parts necessary for installation.
3. Tread the 2 mounting screw (A) about 1/4" into the pre-drilled holes in the Crossbar spaced the same distance apart as the holes in the fixture. (See Fig. 1)
4. Attached the crossbar to the outlet box, using the 2 screws (B) from the outlet box, the side of the crossbar marked "GND" must face out.
5. Hold the fixture towards the crossbar and connect the electrical wires as follows (See Fig. 2), connect the black wire from the fixture to the black house (HOT) wire; connect the white wire from the fixture to the white house (Neutral) wire. Make sure all wire nuts are secured. You may wrap up the connections with electrical tape. If your outlet box has ground wire (green or bare copper) connect fixture's ground wire to it, other wise attach the bare copper fixture wire to the green ground screw on the cross bar (B). tuck the wire connections neatly into the ceiling junction box as you holding the fixture assembly toward the ceiling.
6. Finishing mounting the fixture by placing it over both mounting screws (A) so that the screws protrude through the mounting holes in the top cap of the fixture, secure the fixture by tighten 2 ball nuts (9) tread with mounting screw (A).
7. Install the light bulbs in accordance with the fixture's specifications. **DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**

Your installation is now complete. Turn on the power supply of the junction box to test the fixture.

Fig. 1


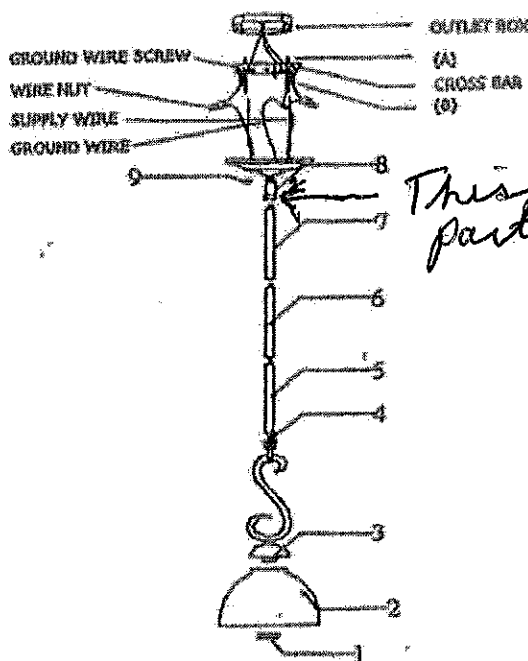


Fig. 2

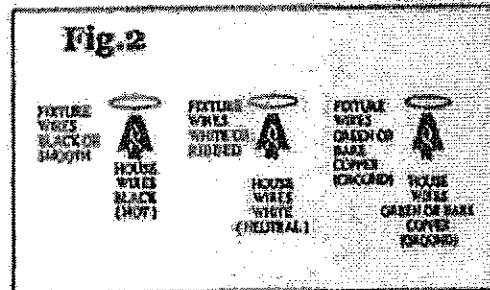

american  
lighting  
association